RANGE COMPOSITION

N 900: a range of over 150 models for the professional caterer designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected in the total modularity of the range that ensures innumerable configurations, either free-standing, bridged or cantilever. N900 demonstrates how advanced technology can satisfy the needs of the professional caterer.

The model detailed on this sheet is a top electric versions ideal for uniform cooking using pots and pans, even large size ones.



N 900

ELECTRIC HOBS




FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Worktop in 20/10 stainless steel. Front and side panels in stainless steel with Scotch-Brite finish.
- ◆ This model has right-angled side edges to allow flush fitting joins between units, eliminating gaps and possible dirt traps.
- ◆ 2 indipendently controlled cooking zones.
- ◆ Cooking hob in smooth-surfaced carbon steel, guaranteeing temperature uniformity for low temperature cooking, enabling either uniform temperature across the whole hob, 2 different temperature zones on the same hob or heating of only one section of the hob.
- ◆ Removable hob plate.
- ◆ The special design of the control knob system guarantees against water infiltration.
- ◆ Main connections can be via the base or the rear of the unit.
- ◆ This model can be easily mounted

on the refrigerated base, open base cupboards, bridging supports or cantilever systems.

◆ IPX5 water protection.

TECHNICAL DATA	
CHARACTERISTICS	MODELS
	NTRE400 200226
Power supply	Electric
External dimensions - mm	
width	400
depth	900
height	250
Cooking surface	
type	Smooth
material	Mild Steel
Thermostatic	•
Cooking surface dimensions - mm	
width	360
depth	715
Working temperature - min/max - °C	80, 450
Electrical power - kW	7
Net weight - kg.	60
Supply voltage	400 V, 3N, 50/60

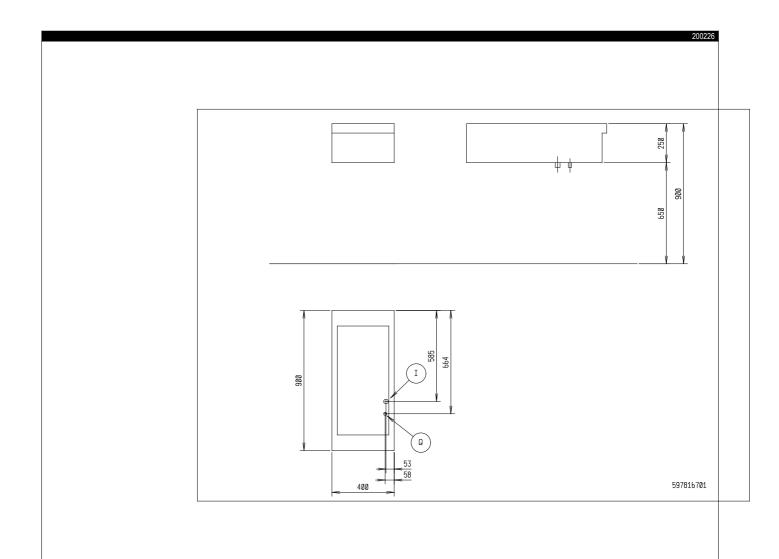

LEGEND	
	NTRE400 200226
I - Electrical connection	400 V, 3N, 50/60

OPTIONAL ACCESSORIES	
ACCESSORIES	MODELS
	NTRE400 200226
2 SIDE COVERING PANELS FOR TOP-D=900MM	206278
CHIMNEY UPSTAND 400MM	206303
DRAUGHT DIVERTER WITH 120 MM DIAMETER	206126
FLUE CONDENSER FOR 1/2 MOD. DIAM.120MM	206155
FRONTAL HANDRAIL 1200 MM	206191
FRONTAL HANDRAIL 1600 MM	206192
FRONTAL HANDRAIL 400 MM	206166
FRONTAL HANDRAIL 800 MM	206167
JUNCTION SEALING KIT	206086
LARGE HANDRAIL(PORTIONING SHELF)400 MM	206185
LARGE HANDRAIL(PORTIONING SHELF)800 MM	206186
PAIR OF COVERING STRIPS FOR END ELEMENTS	206234
REAR FLUE UPSTAND FOR SMALL CHIMNEY	206159
SIDE HANDRAIL-RIGHT/LEFT HAND	206165
WATER COLUMN EXTENSION FOR 900 LINE	206290
WATER COLUMN WITH SWIVEL ARM	206288









www.zanussiprofessional.com